

ARI

TITANIUM
PLUS

TITANIUM PLUS

**COMFORT**

- High V40

EFFICIENCY&ENERGY SAVING

- Ecological polyurethane insulation

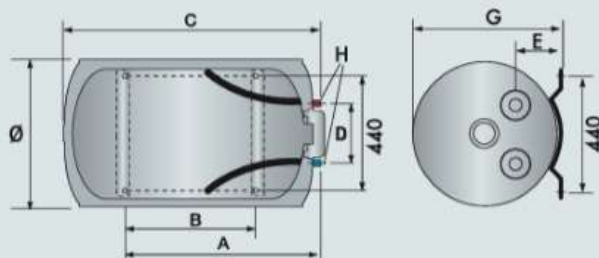
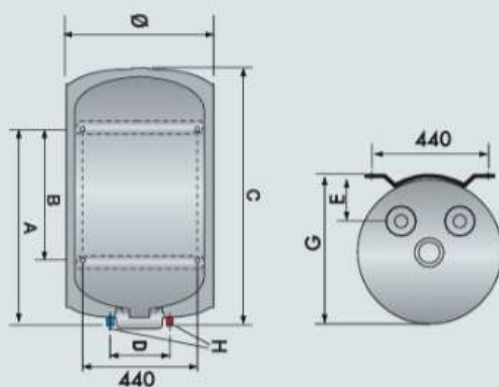
QUALITY

- Titanium glasslined inner tank tested at 12 bar
- Oversize magnesium anode
- 6-bolts flange
- Pressure safety valve rated at 6 bar

DESIGN

- Exclusive Italian design
- Wall-hung

**easy
and safe**

**LEGEND**

E Cold water inlet G 3/4"

U Hot water outlet G 3/4"

TECHNICAL DATA

		ARI 150 V THER	ARI 150 H THER	ARI 200 V THER	ARI 200 H THER
Capacity	l	150	150	200	200
Power	kW	1.8	2	2.2	2
Voltage	V	230	230	230	230
Heating time (deltaT= 50°C)	h,min	5.10	4.40	5.35	5.50
Heat dispersion	kWh/24h	1.41	1.68	1.85	2.06
Max working temp.	°C	65	75	65	75
Protection	IP	IP25D	IP25	IP25D	IP25
Weight	kg	37	39	45	47

OVERALL DIMENSIONS

a	mm	750	750	1050	1050
b	mm	500	500	800	800
c	mm	1010	1020	1270	1285
d	mm	230	230	230	230
e	mm	175	180	175	180
f	mm	560	570	560	570
g	mm	575	585	575	585
h	mm	G3/4	G3/4	G3/4	G3/4

CODE (UAE)**CODE**

3010909	3010907	3010910	3010908
3000326	3010895	3000327	3010899