

AURES SLIM

ITALIAN
DESIGNCOMPACT
SIZEEXTERNAL
POWER
REGULATIONIP25
WATERPROOFDOUBLE
SAFETY
THERMOSTAT

SINGLE POINT

SINGLE POINT

- / Italian design
- / Compact sizes and easy to install
- / Energy saving and efficiency
- / Single point installation
- / Protection from water splash IP25: it can be installed inside shower box
- / Frontal Regulation: to set the power
- / Double Thermal cut out thermostat prevents scalding - safety system
- / Shower head & Tap accessory
- / 4 knob Power settings: Off, Low (1°HE), Med (2°HE), High (1+2° HE)
- / 2 led (to show what heating Element/s On)
- / From 5.5kw is possible to make product: mono/ Double phase


ENERGY CLASS



TECHNICAL DATA		S 3.5 SH PL	S 3.5 COM PL	S 4 SH EU	S 5 SH EU	S 5.5 SH EU	S 7 SASO SAUDI	S 7.7 SH EU
Voltage	V	220-240	220-240	220-240	220-240	220-240	220	220-240
Power	kW	3,5	3,5	4	5	5,5	7kW	7,7kW
Step Power	kW	1,5+2	1,5+2	1+3	2+3	2,2+3,3	3+4	3,3+4,4
Phase		Mono	Mono	Mono	Mono	Mono	Mono	Mono
Ampere at 220V		15,9	15,9	18,2	22,7	25	31,8	35
Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60hz	50/60hz
Heating element		Copper	Copper	Copper	Copper	Copper	Copper	Copper
MIN Working Pressure	bar	0,3	0,3	0,2	0,2	0,2	0,3	0,3
MAX Working Pressure	bar	8	8	8	8	8	8	8
IP protection degree		IP25	IP25	IP25	IP25	IP25	IP25	IP25
Max working temperature	°C	55	55	55	55	55	55	55
Cable & Plug		Cable&Plug	Cable&Plug	No	No	No	No	No
Shower/Tap kit		A	E	A	A	A	A	A
CODE		3520016	3520010				3520014	3520017
Erp class		-	-	3520011	3520012	3520013	-	-
Tapping profile		-	-	A	A	A	-	-
		-	-	XXS	XXS	XS	-	-

The capacity indicated in this catalogue identifies the product category.

The effective capacity of the product is given in the relevant technical documentation provided with the product.

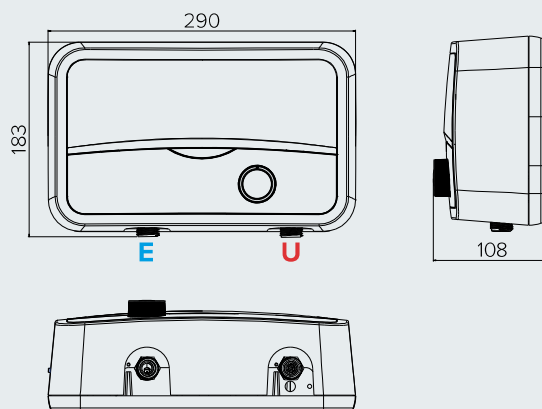

LEGEND

- E Cold water inlet G 1/2"
- U Hot water outlet G 1/2"